


Zehnder Forma Spa

Electric operation

Product data sheet

always the best climate

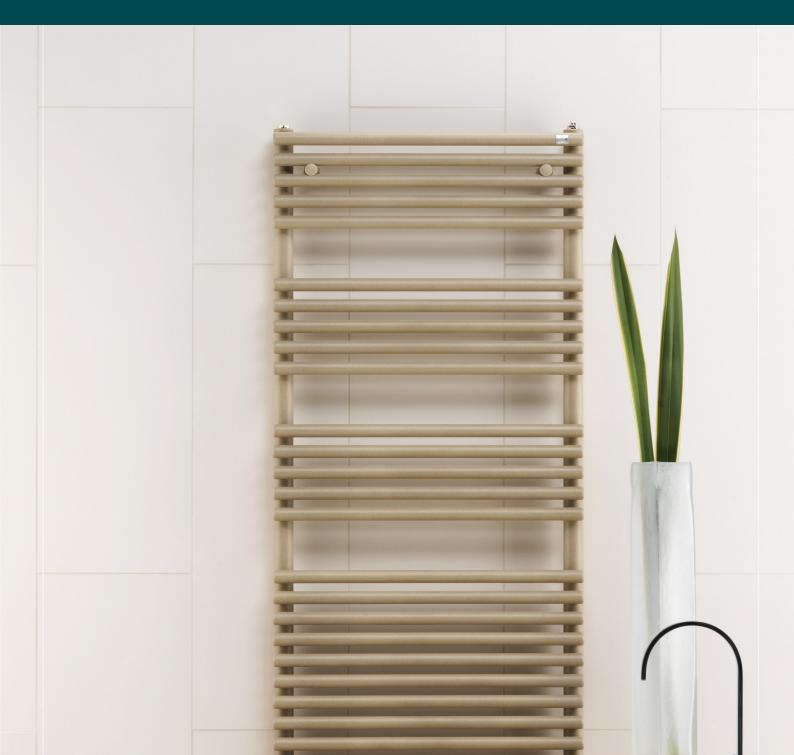



A pleasant heat and a relaxed look for your bathroom. The reason is its tube-on-tube construction. Generous wall clearance creates space for hanging large, fluffy towels. That is Zehnder Forma Spa. Available in almost any colour and finish from the Zehnder colour chart.

Advantages


- Relaxed look through cross-connected tubes
- Available as single or double-layered versions, offering the right solution for different output requirements
- Generous spaces between tubes in the single-layer model convenient for hanging towels
- Brushed stainless steel version ensures resistance to corrosion
- Aesthetically pleasing design due to flat and discreetly integrated boost heater
- Comfort on demand due to adjustable boost heating

Special benefits for electric operation

- Demand control provided by three radiator temperature levels
- Heat is readily available due to pre-defined timer function
- Dry-running protection prevents temperature warning
- Comes ready-to-plug for easy and quick installation
- Customisable daily and weekly programmes for convenient, on-demand operation
- Energy-efficient and comfortable heating with innovative "open window detection"
- Electric operation provides warm towels and comfortable rooms all year round
- High energy efficiency due to compliance with the European Ecodesign Directive reduces energy costs
- Low energy consumption of only 0.5 W or less in stand-by mode for increased energy efficiency
- User-friendly remote control allows simple operation
- Increased safety with keylock
- Flexible control options: remote control for wall
 mounting or base mount
- Maximum surface temperature of 65 °C ensures increased safety (chrome-plated version)
- Modular range: Remote control enabling functions such as the use of daily and weekly programmes via an app can be purchased separately
- Remote control for regulating room temperature as required with four adjustable temperatures




Model overview




Front view, LF/LFD-070


721



 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000
 1000



Front view, LF/LFD-150



Front view, LF/LFD-180

Side view, LF

Side view, LFD

D = 76+15

Painted version

Model	н	L	Power electric hea- ting element
	mm	mm	Watts
LFE-070-050/GD	721	496	300
LFE-120-050/GD	1161	496	500
LFE-180-050/GD	1761	496	900
LFE-120-060/GD	1161	596	600
LFE-180-060/GD	1761	596	900

H = height, L = length

HT = *Total height incl. electric heating element*



Accessories

