

# Zehnder Toga

Hydronic operation

Product data sheet

always the best climate



Always in the right place. No matter whether bathroom, kitchen or gym, Zehnder Toga delivers top performance everywhere. Through perfect dimensions, seamless design with D-profile header tubes and numerous special solutions. Available in almost any colour and finish from the Zehnder colour chart.


### Special benefits for hot water operation

- Available with Zehnder Vario connection fitting for an unobtrusive and elegantly concealed connection system
- Flexible installation due to 50mm centre connections

### Advantages

- D-profile header tube creates harmonious design
- Generous cut-outs between the tubes make it convenient for hanging towels
- Wide range of models supports versatile use
- Elegant design in high-quality chrome

### Model overview

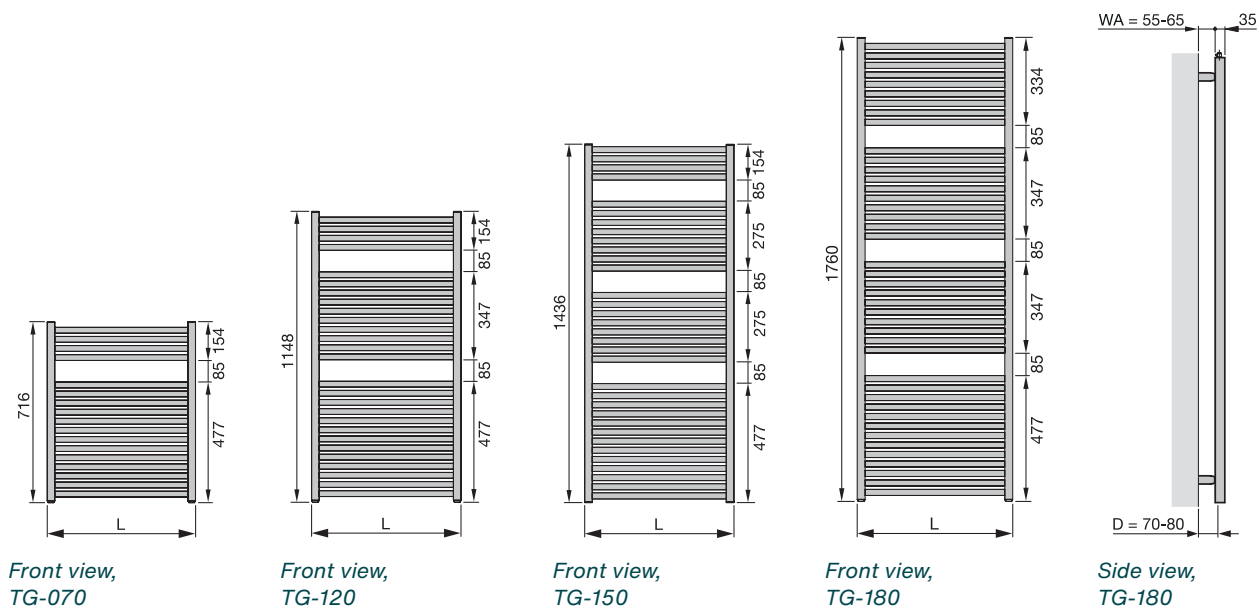

## Painted version

Model	H mm	L mm	Heat output					Power electric heating element Watts
			75/65/20 °C	70/55/24 °C	70/55/20 °C	55/45/24 °C	55/45/20 °C	
			Watts	Watts	Watts	Watts	Watts	
TG-070-045	716	450	347	249	284	154	184	300
TG-120-045	1148	450	539	385	441	237	284	300
TG-180-045	1760	450	823	588	673	362	434	600
TG-070-050	716	500	381	273	312	169	202	300
TG-120-050	1148	500	592	423	484	260	312	300
TG-150-050	1436	500	736	527	601	326	386	600
TG-180-050	1760	500	904	646	739	397	476	900
TG-070-060	716	600	449	323	368	200	239	300
TG-120-060	1148	600	696	497	569	306	367	600
TG-150-060	1436	600	866	621	707	383	454	600
TG-180-060	1760	600	1063	762	870	470	563	900
TG-120-075	1148	750	849	608	695	376	450	900
TG-180-075	1760	750	1297	932	1064	578	690	1200
TG-180-100	1760	1000	1675	1210	1378	756	901	1200

H = height, L = length

75/65/20 = Nominal heat output according to EN 442

## Painted version

Model	H mm	L mm	Heat output				
			75/65/20 °C	70/55/24 °C	70/55/20 °C	55/45/24 °C	55/45/20 °C
			Watts	Watts	Watts	Watts	Watts
TG-070-045-05	716	450	347	249	284	154	184
TG-120-045-05	1148	450	539	385	441	237	284
TG-180-045-05	1760	450	823	588	673	362	434
TG-070-050-05	716	500	381	273	312	169	202
TG-120-050-05	1148	500	592	423	484	260	312
TG-180-050-05	1760	500	904	646	739	397	476
TG-070-060-05	716	600	449	323	368	200	239
TG-120-060-05	1148	600	696	497	569	306	367
TG-180-060-05	1760	600	1063	762	870	470	563
TG-120-075-05	1148	750	849	608	695	376	450
TG-180-075-05	1760	750	1297	932	673	578	690
TG-180-100-05	1760	1000	904	1210	739	756	901

H = height, L = length

75/65/20 = Nominal heat output according to EN 442

## Chrome-plated version

Model	H mm	L mm	Heat output					Power electric heating element Watts
			75/65/20 °C	70/55/24 °C	70/55/20 °C	55/45/24 °C	55/45/20 °C	
			Watts	Watts	Watts	Watts	Watts	
TGC-070-050	716	500	240	169	194	101	124	200
TGC-120-050	1148	500	379	267	307	160	195	300
TGC-150-050	1436	500	478	335	386	201	245	300
TGC-180-050	1760	500	596	419	482	252	307	600
TGC-120-060	1148	600	451	317	365	190	232	300
TGC-180-060	1760	600	709	499	574	299	365	600

H = height, L = length

75/65/20 = Nominal heat output according to EN 442

## Accessories

