

zehnder

always the
best climate

Zehnder Metropolitan Bar

Product data sheet



Functionality combined with ethereal design for the bathroom: Zehnder Metropolitan Bar makes a strong impression. The light and seemingly airy heating tubes in a flat design maximise radiant heat. It is a radiator and towel rail in one. Available in almost any colour and finish from the Zehnder colour chart.

Benefits

- Smooth surface creates an elegant look
- Towel rail for added convenience
- Convenient, individually adjustable towel hooks on request for hanging towels
- High proportion of radiation ensures comfort
- Light and seamless design enhances any room
- The right model for any setting
- Light airy look provided by distinctive triangular profile of frame
- Innovative hybrid welding technology guarantees maximum quality and high-end design

Special benefits for hot water operation

- Elegantly enabled valve integration on request, which discreetly conceals connection fittings


Special benefits for dual energy operation

- Factory-assembled, elegantly integrated electric heating element reduces cost of installation
- Dual energy operation provides warm towels and comfortable rooms all year round

Special benefits for electric operation

- Simple temperature control due to user-friendly control device
- Customisable daily and weekly programmes for convenient, on-demand operation
- Timer function for on-demand operation
- Dry-running protection prevents temperature warning
- Comes ready-to-plug for easy and quick installation
- Factory-assembled electric heating element reduces cost of installation
- The electric radiator provides warm towels and rooms all the year round
- Energy-efficient and comfortable heating with innovative “open window detection”
- Electric operation provides warm towels and comfortable rooms all year round
- High energy efficiency due to compliance with the European Ecodesign Directive reduces energy costs
- Low energy consumption of only 0.5 W in stand-by mode for increased energy efficiency
- Increased safety with keylock
- Flexible control options: control device for wall mounting or base

Model overview

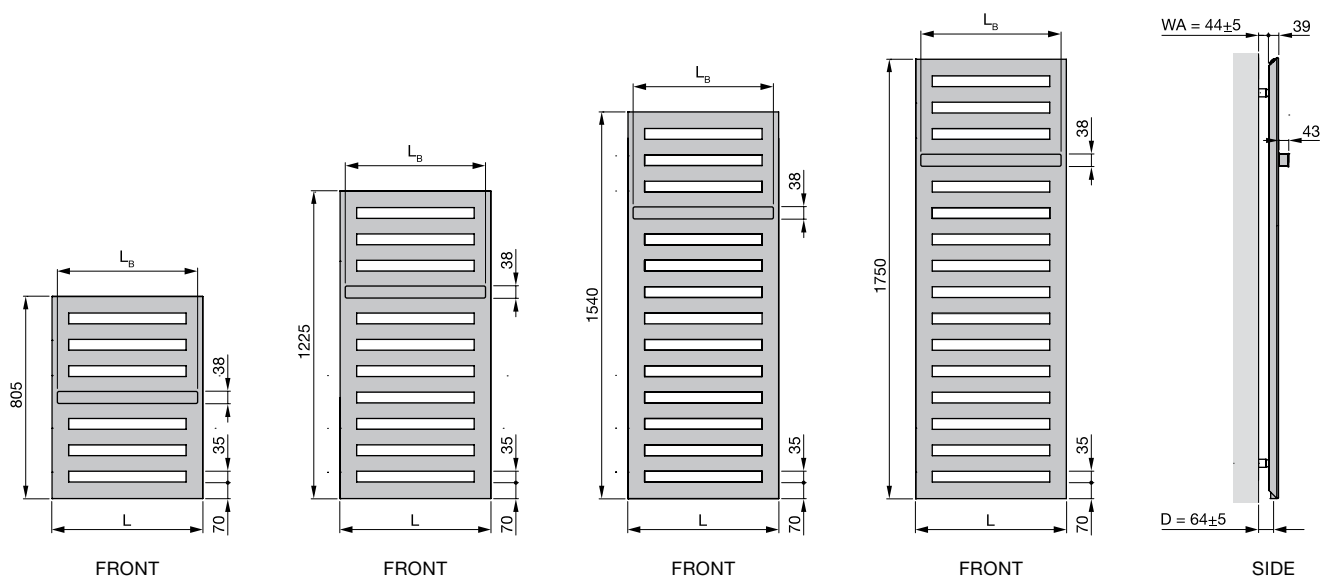

L = length
 L_B = towel rail length
 D = distance from wall to middle of connection
 WA = wall clearance

Dimensions in mm

Connection to hot water central heating system

Painted version

Model	H mm	L mm	L _B mm	Thermal output				Classification electric heating element Watt
				75/65/20 °C ¹⁾ Watt	70/55/24 °C Watt	55/45/24 °C Watt	55/45/20 °C Watt	
With chrome-plated towel rail								
MEP-080-040	805	400	295	323	231	139	167	-
MEP-120-040	1225	400	295	469	336	203	244	-
MEP-150-040	1540	400	295	582	423	262	312	-
MEP-180-040	1750	400	295	663	473	285	343	-
MEP-080-050	805	500	395	387	276	166	200	-
MEP-120-050	1225	500	395	563	403	244	293	-
MEP-150-050	1540	500	395	730	529	327	389	-
MEP-180-050	1750	500	395	795	567	342	411	-
MEP-080-060	805	600	495	449	320	193	232	-
MEP-120-060	1225	600	495	653	467	283	340	-
MEP-150-060	1540	600	495	871	632	390	465	-

Painted version – for installation below windows

Model	H mm	L mm	L _B mm	Thermal output				Classification electric heating element Watt
				75/65/20 °C ¹⁾ Watt	70/55/24 °C Watt	55/45/24 °C Watt	55/45/20 °C Watt	
With chrome-plated towel rail								
MEP-060-090	595	900	795	447	318	191	230	-

Connection for dual energy operation with integrated electric heating element

Painted version

Model	H mm	L mm	L _B mm	Thermal output				Classification electric heating element Watt
				75/65/20 °C ¹⁾ Watt	70/55/24 °C Watt	55/45/24 °C Watt	55/45/20 °C Watt	
With chrome-plated towel rail								
MEPM-120-050/GD	1225	500	395	563	403	244	293	500
MEPM-150-050/GD	1540	500	395	730	529	327	389	600
MEPM-180-050/GD	1750	500	395	795	567	342	411	750

H = height, L = length, L_B = towel rail length

1) Nominal heat output according to EN 442

Zehnder Metropolitan Bar

Electric-only operation


Painted version

Model	H mm	L mm	L _b mm	Output electric heating element Watt
With chrome-plated towel rail				
MEPE-080-040/GD	805	400	295	300
MEPE-150-040/GD	1540	400	295	500
MEPE-180-040/GD	1750	400	295	600
MEPE-120-050/GD	1225	500	395	500
MEPE-150-050/GD	1540	500	395	600
MEPE-180-050/GD	1750	500	395	750
MEPE-180-060/GD	1750	600	495	900

Product types and connection options



Completo version with integrated valve

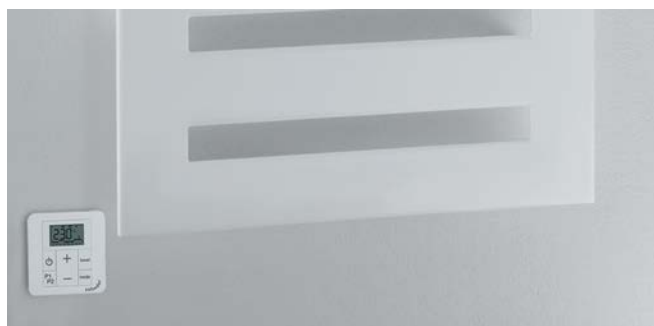

Electric operation version with remote control device.



Electric operation version with remote control device.

H = height, L = length, L_b = towel rail length

1) Nominal heat output according to EN 442